



Premier Site MIXER



PREMIER XT

Belle Group's range of robust site mixers has proven appeal on any construction site.


Now with increased capacity and value added features, the latest XT range is available in 4 model sizes:

- Premier 100XT
- Premier 150XT
- Premier 175XT
- Premier 200XT

All are designed to cope with the most demanding site conditions.



PREMIER XT

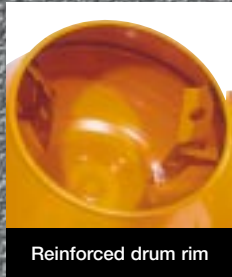

Reinforced drum rim



Strong anti-theft lock



Stronger, rounded frame



Foot operated hand wheel locking




Strong brake device



New Premier Features & Benefits

- Improved drum features a stronger rim design
- Latest paddle design with holes, allows a better mix performance
- Controlled tipping is achieved by the new foot operated hand wheel locking device
- Stronger rounded frame helps prevent build up of concrete
- Improved gearbox performance
- A high security engine/motorbox fully lockable helps prevent theft
- Improved engine/motor box provides good ventilation and access points allowing the Premier XT's to be fully operational with cover closed
- Variety of diesel engines (electric with recoil back-up/handle) and electric options
- All engine variants have full engine manufacturers installation approval

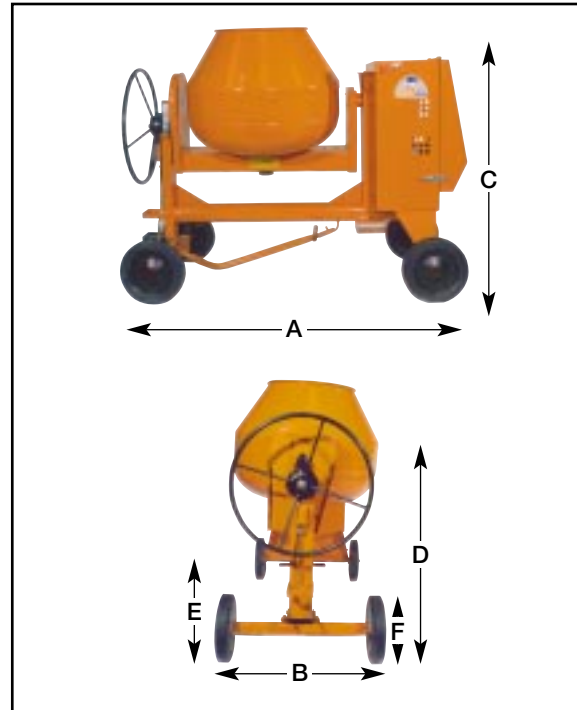

	100XT	150XT	175XT	200XT
A - OVERALL LENGTH (mm)	1790	1790	1890	1890
B - OVERALL WIDTH (mm)	900	900	900	900
C - OVERALL HEIGHT (mm)	1467	1567	1527	1597
D - LOADING HEIGHT (mm)	924	963	948	975
E - DISCHARGE HEIGHT (mm)	542	592	572	607
F - DIAMETER OF WHEELS (mm)	345	345	345	345

	100XT	150XT	175XT	200XT
CUBIC FEET IN/OUT	5/3.5	7/5	8/6	10/7
MIXED BATCH OUTPUT (L)	115	160	180	220
MAX DRUM CAPACITY (L)	250	300	350	400
MAX DRY MIX CAPACITY (L)	160	220	250	310
DRUM SPEED (RPM)	19	19	19	19

PREMIER DIESEL RANGE TECHNICAL DATA

	LISTER				YANMAR			
	100XT	150XT	175XT	200XT	100XT	150XT	175XT	200XT
UNLADEN WEIGHT (kg)	367	376	392.5	395	334.5	343.5	350.5	353.5
ENGINE MODEL	LT1(B32)	LT1(B32)	LT1(B10)	LT1(B10)	L40AE	L40AE	L40AE	L40AE
NOMINAL POWER (kW)	0.75	0.75	1.9	1.9	2.3	2.3	2.3	2.3
STARTING METHOD	HANDLE START				ELECTRIC WITH RECOIL BACK-UP			
FUEL CAPACITY (L)	5	5	5	5	2.5	2.5	2.5	2.5
RUNTIME/TANK (Hrs)	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5

PREMIER ELECTRIC RANGE TECHNICAL DATA

	110V/50Hz				230V/50Hz				415V/50Hz			
	100XT	150XT	175XT	200XT	100XT	150XT	175XT	200XT	100XT	150XT	175XT	200XT
UNLADEN WEIGHT (kg)	305.5	314.5	322.5	325	303.5	312.5	320.5	323	305.5	314.5	322.5	325
NOMINAL CURRENT (A)	13.7	13.7	13.7	13.7	6.6	6.6	6.6	6.6	3.6	3.6	3.6	3.6
MOTOR (RPM)	1350	1350	1350	1350	1430	1430	1430	1430	1500	1500	1500	1500
POWER CONSUMPTION (kW/hr)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5